

4:3

WIDESCREEN



CAPACITIVE
MULTI-TOUCH



INTEGRATED
CUSTOMER DISPLAY*



LECTEUR*
DALLAS



BADGE*



IP65




*in option

LCD 150

Enhanced User/Customer Experience
Ergonomic, Stylish and Compact
Support VESA Wall Mount

LCD 150

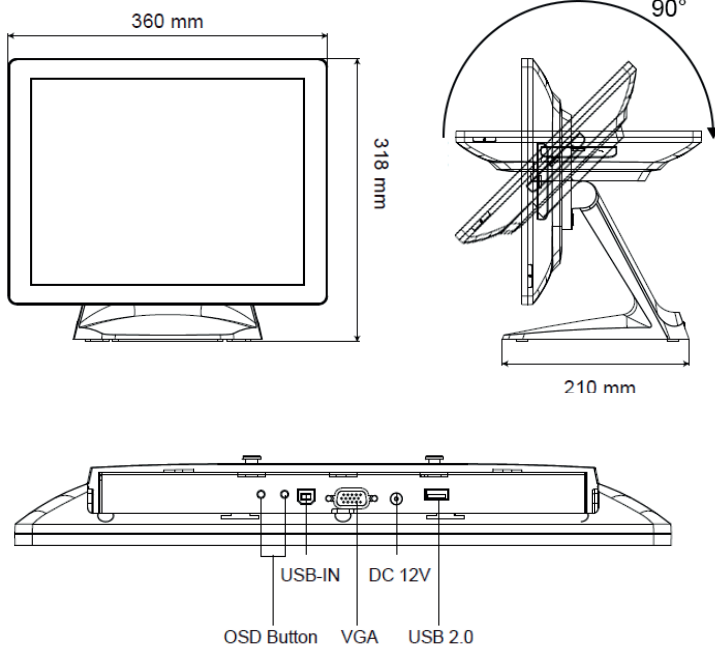

ÉCRAN	LCD Size	15" LED
	Brightness	300 nits
	Resolution	1024 x 768
	Touch Screen	PCAP Touch
	Tilt Adjustment	0° ~ 90°
I/O PORTS	USB	1x USB2.0 (Type A) 1x USB2.0 (Type B to PC)
	VGA	1x DB15
	DC Jack	1x 2 pin
	OSD Button	2 (Power, Auto) + LED
	ALIMENTATION	Power Adapter
OPTIONS	MSR	3-Track MSR (USB)
	iButton	iButton (USB)
	Customer Display	LCM display 2 x 20 characters (USB)
CERTIFICAT	EMC & Safety	FCC Class A, CE Mark, LVD
ENVIRONNEMENT	Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
	Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
	Humidity	20% ~ 85% RH non-condensing
DIMENSIONS	360 x 218 x 250 à 339 mm	
POIDS	4,34 kg	
VESA	VESA Mount 100 x 100	

Specifications are subject to change without notice © OXHOO 2018

